

True Union Diaphragm Valve Type AN (Pneumatic Type)

Features

- Near-Linear flow characteristics
- Newly equipped with bottom stand with insert hole to ensure easy and secure installation.
- The valve body can be removed from the line.



Basic specifications

- Valve Type : True Union Diaphragm Valve Type AN
- Size : 15 mm - 50 mm (1/2 inch – 2 inch)
- Body Material : U-PVC (Conforming to ASTM D1784 Cell Classification 12454A)
C-PVC (Conforming to ASTM D1784 Cell Classification 23567-A)
PP (Conforming to ASTM D4101 Cell Classification PP0110B67272)
PVDF (Conforming to ASTM D3222 Cell Classification Type II)
- Seal Material / Diaphragm : EPDM, PTFE, FKM etc.
- Connection / Socket : JIS, DIN 8063/16962, ASTM D2467
*For BS, contact us.
Threaded : Rc, Rp, NPT
Spigot : DIN

Body Material	Fluid Temperature °C { °F }	Maximum working pressure (Normal temperature) MPa { psi }	Connection method		
			SOCKET	SPIGOT	THREADED
U-PVC	0 ~ 50 { 30~120 }	1.0 { 150 }	○	○	○
C-PVC	0 ~ 90 { 30~195 }	1.0 { 150 }	○	-	○
PP	-20 ~ 80 { -5~175 }	1.0 { 150 }	○	○	○
PVDF	-20 ~ 100 { -5~210 }	1.0 { 150 }	○	○	○

Note: The maximum working pressure is the value including the water hammer pressure. Be careful that the maximum working pressure is not exceeded during use.


* Concerning the allowable pressure for each temperature, material and actuator type, see the technical documents at the next page of this sheet.

Working pressure vs. Temperature


AUTOMATIC PNEUMATIC

DOUBLE ACTING / AIR TO CLOSE : 15mm - 50mm

AIR TO OPEN : 15mm - 40mm

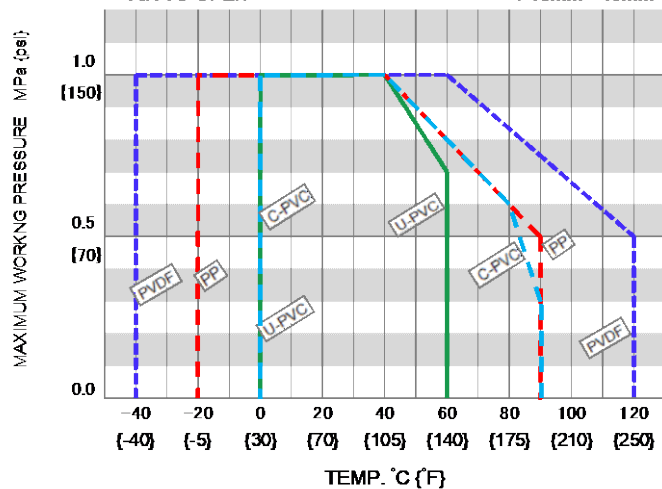


AIR TO OPEN RUBBER : 50mm

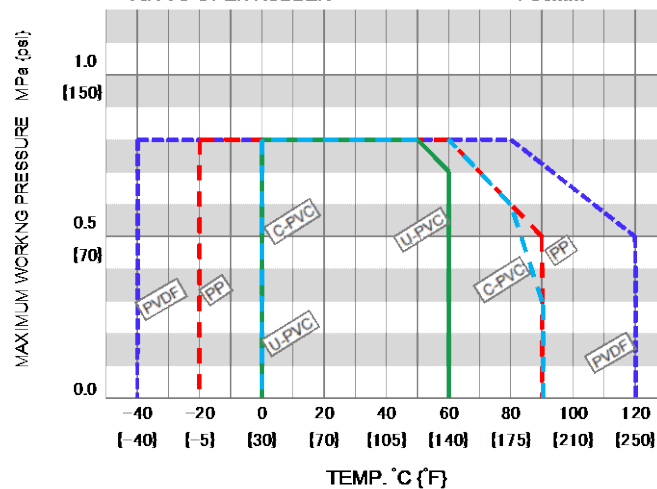


AUTOMATIC PNEUMATIC

AIR TO OPEN : 50mm

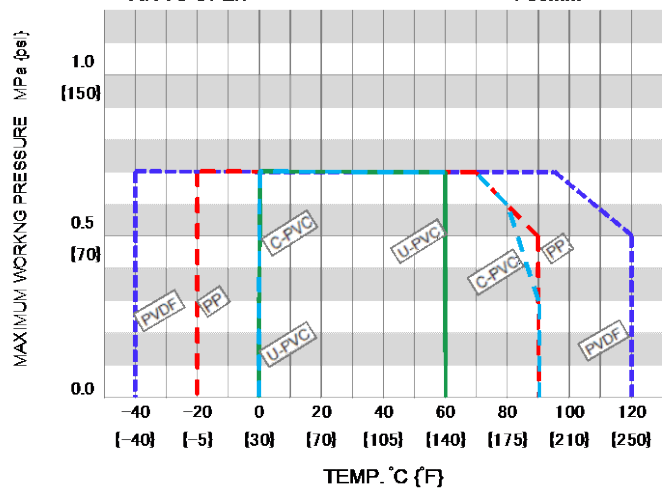

Note : Make sure that the temperature and pressure are within the working range during operation.
(If the tolerance range is exceeded during use, the valve may be damaged.)

Product dimension

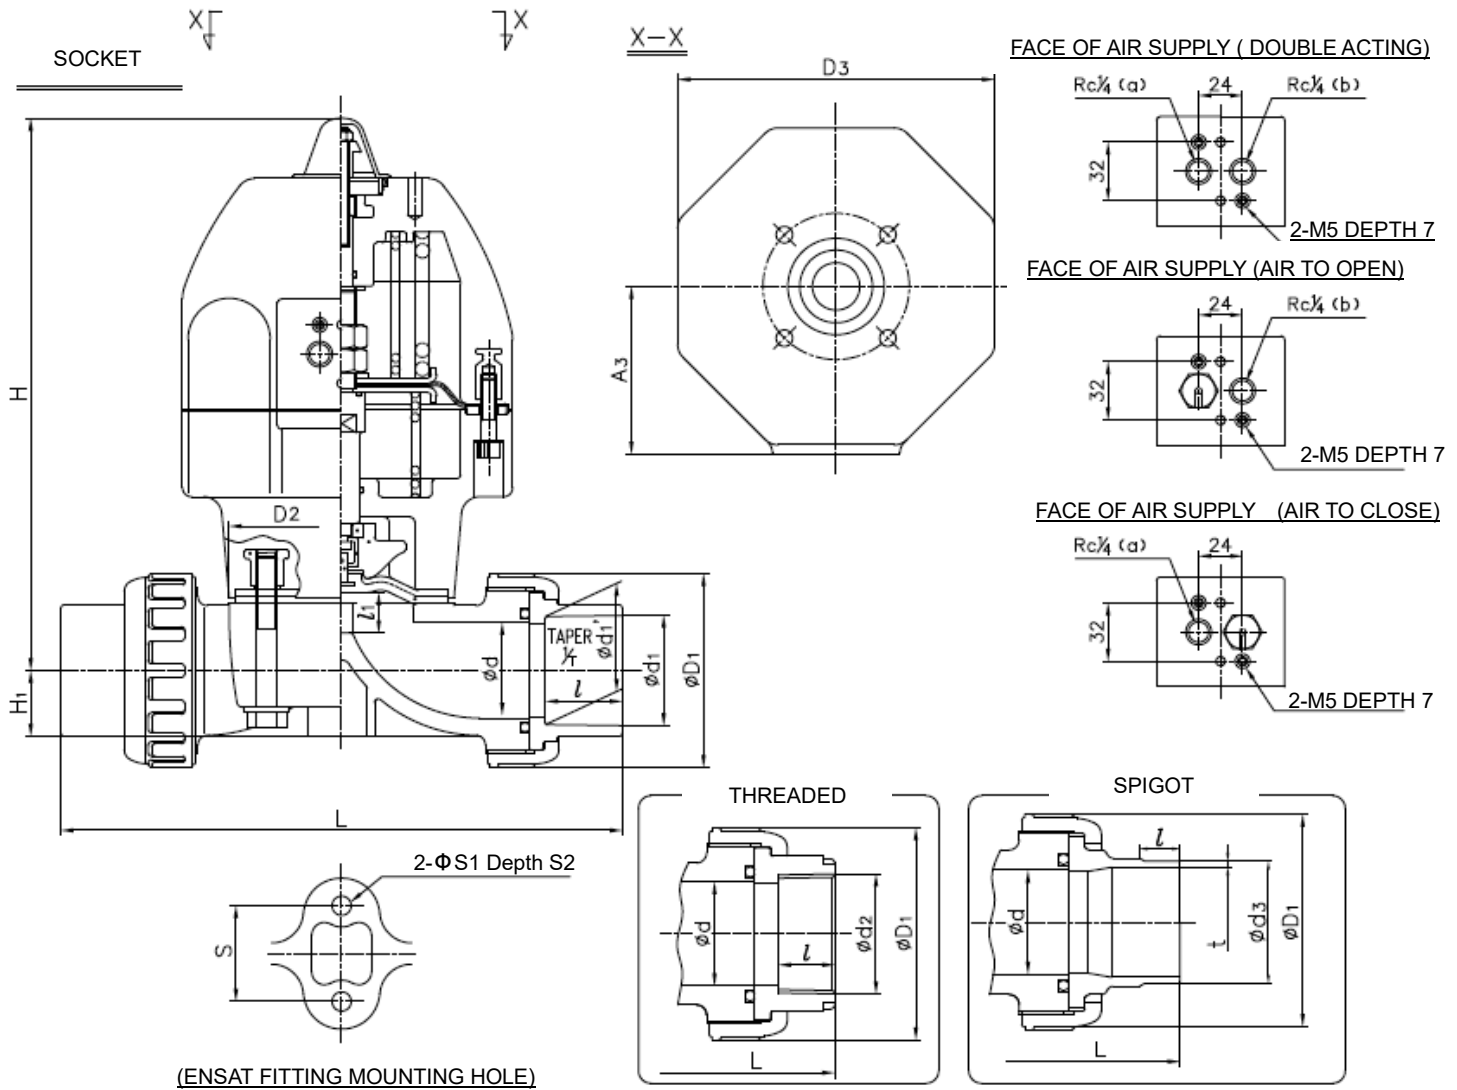

■ JIS, DIN (Unit: mm)

mm	d	D ₁	D ₂	D ₃	H	H ₁	A ₃	S	S ₁	S ₂	P	JIS											
												SOCKET						THREADED					
												PVC, C-PVC				PP				d ₂		L	
												d ₁	ℓ	1/T	L	d ₁	d ₁ '	ℓ	L	d ₂	ℓ	U-PVC C-PVC	PP
15	16	48	54X66	130	186	19.5	68	25	7	13	1/4	22.11	20	1/34	134	21.2	20.2	20	134	Rc 1/2	15	128	128
20	20	60	54X66	130	188	17.5	68	25	7	13	1/4	26.13	24	1/34	156	26.2	25.2	23	154	Rc 3/4	17	148	148
25	25	70	67X80	130	193	18.5	68	25	7	13	1/4	32.16	27	1/34	186	33.0	32.0	25	182	Rc 1/2	20	172	172
32	32	82	67X80	130	197	22.5	68	25	7	13	1/4	38.19	30	1/34	200	-	-	-	-	Rc 1 1/4	22	188	188
40	40	100	108X108	174	293	27.5	92	45	9	15	1/4	48.21	37	1/37	271	47.0	46.0	28	253	Rc 1 1/2	25	245	245
50	52	106	123X123	174	302	36	92	45	9	15	1/4	60.25	42	1/37	303	59.0	58.0	28	275	Rc 2	28	281	278

	DIN																
mm	SOCKET							THREADED				SPIGOT					
	PVC,C-PVC			PP,PVDF				d2	ℓ	L		PVC,C-PVC			PP,PVDF		
	d1	ℓ	L	d1	d1'	ℓ	L			U-PVC C-PVC	PP PVDF	d3	ℓ	L	d3	ℓ	L
15	20	16	128	19.5	19.3	14.5	125	Rp 1/2	15	128	128	20	18.5	150	20	18.5	150
20	25	19	147	24.5	24.3	16	141	Rp 3/4	17	148	148	25	24	172	25	22	172
25	32	22	172	31.5	31.3	18	164	Rp 1	20	172	172	32	24.5	195	32	22.5	195
32	40	26	188	39.45	39.2	20.5	177	Rp 1 1/4	22	188	188	40	28	212	40	26	212
40	50	31	246	49.45	49.2	23.5	231	Rp 1 1/2	25	245	245	50	34	276	50	32	276
50	63	38	294	62.5	62.1	27.5	274	Rp 2	28	281	278	63	38.5	308	63	36	307


■ ANSI (Unit: inch)

ANSI (Unit: inch)													ANSI										
inch	mm	d	D ₁	D ₂	D ₃	H	H ₁	A ₃	S	S ₁	S ₂	P	SOCKET							THREADED			
													PVC,C-PVC				PP,PVDF			d2	ℓ	L	
													d1	d1'	ℓ	L	d1	ℓ	L			U-PVC C-PVC	PP PVDF
1/2	15	0.63	1.89	2.13X2.60	5.12	7.32	0.77	2.68	0.98	0.28	0.51	1/4	0.848	0.836	0.875	5.47	0.83	0.87	5.43	1/2-14NPT	0.59	5.04	5.04
3/4	20	0.79	2.36	2.13X2.60	5.12	7.40	0.69	2.68	0.98	0.28	0.51	1/4	1.058	1.046	1.000	6.18	1.03	1.00	6.09	3/4-14NPT	0.67	5.83	5.83
1	25	0.98	2.76	2.64X3.15	5.12	7.60	0.73	2.68	0.98	0.28	0.51	1/4	1.325	1.310	1.125	7.32	1.30	1.13	7.24	1-11 1/2NPT	0.79	6.77	6.77
1 1/4	32	1.26	3.23	2.64X3.15	5.12	7.76	0.89	2.68	0.98	0.28	0.51	1/4	1.670	1.655	1.250	7.95	1.65	1.25	7.80	1 1/4-11 1/2NPT	0.87	7.40	7.40
1 1/2	40	1.57	3.94	4.25X4.25	6.85	11.54	1.08	3.62	1.77	0.35	0.59	1/4	1.912	1.894	1.375	10.47	1.89	1.37	10.28	1 1/2-11 1/2NPT	0.98	9.65	9.65
2	50	2.05	4.17	4.84X4.84	6.85	11.89	1.42	3.62	1.77	0.35	0.59	1/4	2.387	2.369	1.500	11.54	2.36	1.50	11.54	2-11 1/2NPT	1.10	11.06	10.95

ACTUATOR SELECTION CHART

SIZE	ACTUATOR TYPE		
	DOUBLE ACTING	AIR TO OPEN	AIR TO CLOSE
15mm(1/2inch)	AN-1DA	AN-1AO	AN-1AS
20mm(3/4inch)			
25mm(1inch)	AN-2DA	AN-2AO	AN-2AS
32mm(1 1/4inch)			
40mm(1 1/2inch)	AN-3DA	AN-3AO	AN-3AS
50mm(2inch)	AN-4DA	AN-4AO	AN-4AS

Parts list

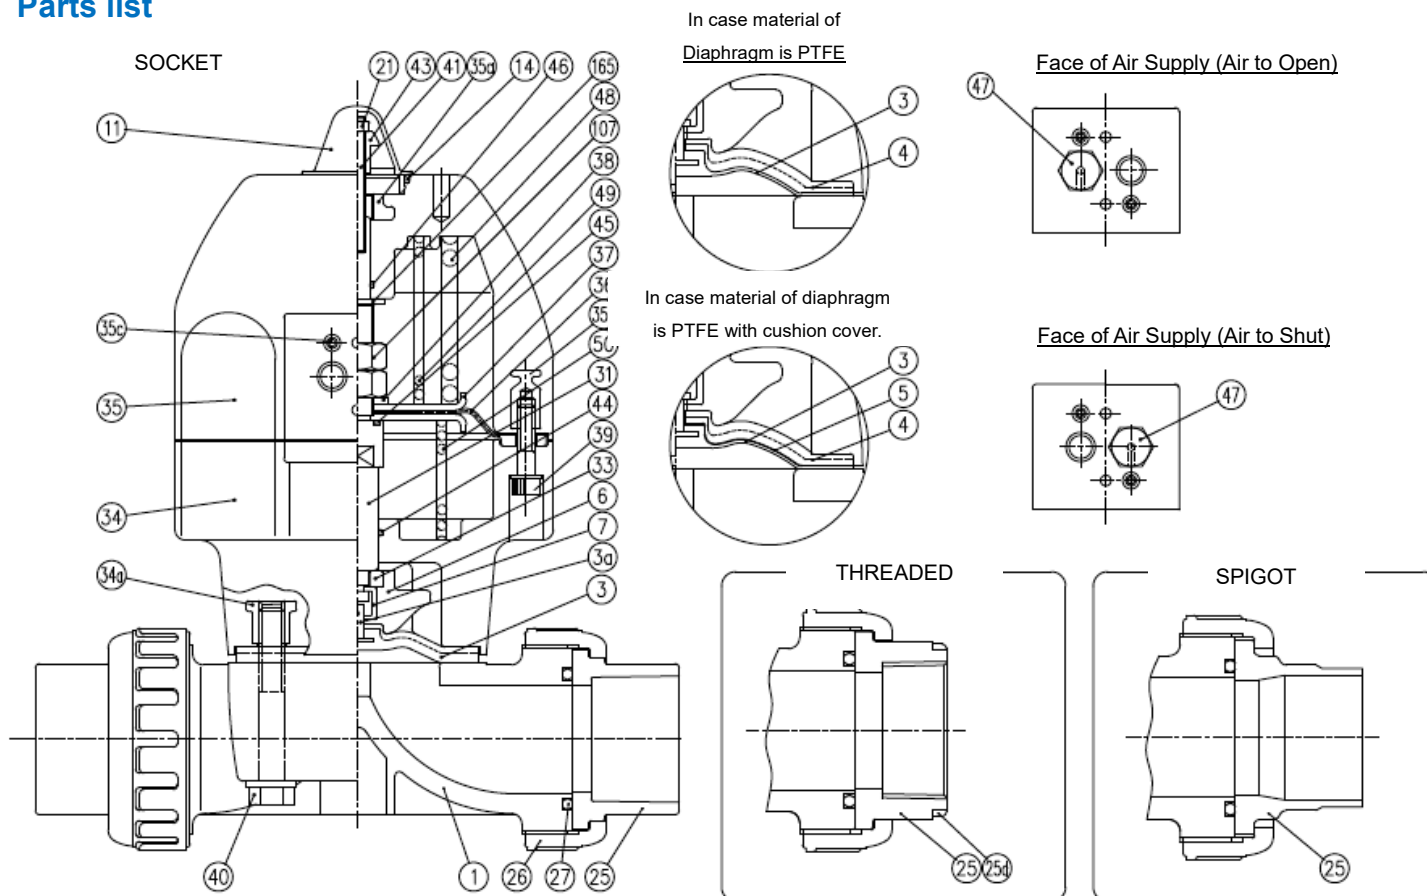

PART NO./NAME		QTY	MATERIAL	PART NO./NAME		QTY	MATERIAL	PART NO./NAME		QTY	MATERIAL
1	BODY	1	PVC, C-PVC, PP, PVDF	31	STEM	1	COPPER ALLOY	44	O-RING (D)	1	NBR
25	END CONNECTOR	2		33	COMPRESSOR PUSHING PLATE	1	COPPER ALLOY	45	O-RING (E)	1	NBR
26	UNION NUT	2		34	CYLINDER BODY	1	PPG	46	O-RING (F)	1	NBR
3	DIAPHRAGM	1		EPDM, PTFE, Others	34a	INSERTED METAL OF CYLINDER BODY	4	COPPER ALLOY	47	NIPPLE	1
3a	INSERTED METAL OF DIAPHRAGM	1	STAINLESS STEEL	35	CYLINDER BONNET	1	PPG	48	SPRING (A)	1	User for Air to Shut and Air to open
4	CUSHION	1	EPDM	35a	INSERTED METAL OF CYLINDER BONNET (A)	1	STAINLESS STEEL				STAINLESS STEEL(SWOSM-B)
5	CUSHION COVER	1	Nothing, PVDF	35b	INSERTED METAL OF CYLINDER BONNET (B)	8	COPPER ALLOY	49	SPRING (B)	1	User for Air to open
			User for PTFE Diaphragm	35c	SCREWED METAL OF CYLINDER BONNET	2	STAINLESS STEEL				STAINLESS STEEL(SWOSM-B)
6	COMPRESSOR	1	PVDF	36	CYLINDER DIAPHRAGM	1	NBR	50	SPRING (C)	1	User for Air to open
7	JOINT	1	STAINLESS STEEL	37	CYLINDER DIAPHRAGM PLATE	2	STAINLESS STEEL				STAINLESS STEEL(SWOSM-B)
11	GAUGE COVER	1	PC	38	CONICAL SPRING WASHER (B)	1	STAINLESS STEEL	107	LOCK NUT	2	User for Air to Shut
14	O-RING (A)	1	EPDM	39	BOLT (A)	8	STAINLESS STEEL				STAINLESS STEEL
21	NUT	1	STAINLESS STEEL	40	BOLT (B)	4	STAINLESS STEEL	165	WASHER	1	STAINLESS STEEL
27	O-RING (C)	2	EPDM, Others	41	INDICATING ROD	1	STAINLESS STEEL	25d	RING	2	STAINLESS STEEL
				43	STOPPER	1	STAINLESS STEEL				User for C-PVC Body. Threaded End : 15-25mm

Diaphragms except EPDM and PTFE are available in FKM, VIFLON®C (FKM-C), VIFLON®F (FKM-F), CPE, CSM, NBR and IIR when required.
The shape and appearance of assembly differ a little with nominal size compared to this drawing.


Technical Data of Actuator

Lightweight and compact size due to plastic actuator.

Air piping is compatible with NAMUR standard.

Options are easily removable/ replaceable and can be mounted later (except positioned).

Equipped with stopper that can be adjusted at full closed position..

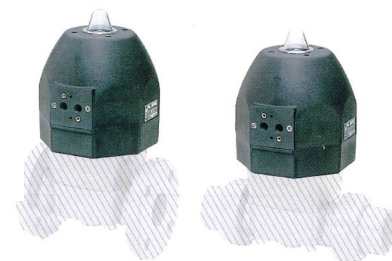

BASIC SPECIFICATIONS

DOUBLE ACTING	ACTUATOR TYPE				UNIT
	AN-1DA	AN-2DA	AN-3DA	AN-4DA	
OPERATING PRESSURE	0.4-0.6				MPa
AIR CONSUMPTION	2.6	2.7	9.6	9.8	NI/OPEN & CLOSE (0.4MPa)
AIR SUPPLY BORE	Rc1/4				

AIR TO OPEN	ACTUATOR TYPE				UNIT
	AN-1AO	AN-2AO	AN-3AO	AN-4AO	
OPERATING PRESSURE	0.4-0.6				MPa
AIR CONSUMPTION	0.8		3.4		NI/OPEN & CLOSE (0.4MPa)
AIR SUPPLY BORE	Rc1/4				

AIR TO CLOSE	ACTUATOR TYPE				UNIT
	AN-1AS	AN-2AS	AN-3AS	AN-4AS	
OPERATING PRESSURE	0.4-0.6				MPa
AIR CONSUMPTION	1.8	1.9	6.1	6.3	NI/OPEN & CLOSE (0.4MPa)
AIR SUPPLY BORE	Rc1/4				

OPTION COMBINATION

COMBINATION NO.	1 ^{*4}	2 ^{*4}	3	4 ^{*4}	5	6	7	8	9
SOLENOID VALVE ^{*1}	○	—	—	○	○	—	○	—	—
FILTER REGULATOR	—	—	—	○	—	—	○	—	○
SPEED CONTROLLER ^{*2}	◎	○	—	◎	◎	○	◎	—	—
LIMIT SWITCH ^{*3}	—	—	○	—	○	○	○	—	—
POSITIONER (E/P,P/P)	—	—	—	—	—	—	—	○	○

*1 Equipped with a built-in speed controller and bypass valve.

*2 ◎ indicates solenoid valve-dedicated type.

*3 When using the limit switch at 1 to 100mA or 5 to 30V, contact our sales office in your area.

*4 The "full opening adjustment" and "manual override (air to open only)" are available only for the combination No. 1, 2 and 4.


DATASHEET

OPTION LIST	MANUFACTURER	BASIC SPECIFICATIONS
SOLENOID VALVE NAMUR	KONAN	- WATER PROOF, EXPLOSION PROOF - POWER SOURCE AC100V, AC110V, AC200V, AC220V, DC24V
FILTER REGULATOR	KONAN	
SPEED CONTROLLER	KONAN	* Since a solenoid valve has a built-in exhaust valve, when a solenoid valve is mounted, no speed controller is necessary.
BYPASS VALVE (SPEED CONTROLLER)	KONAN	
LIMIT SWITCH	AZBIL (formerly YAMATAKE)	- WATER PROOF, EXPLOSION PROOF - OPEN: 1pc, CLOSE: 1pc, OPEN/CLOSE: 2pcs
POSITIONER	YTC	- E/P: INPUT SIGNAL CURRENT DC 4-20 mA - P/P: INPUT SIGNAL AIR PRESSURE 0.02 - 0.1 MPa
MANUAL OVERRIDE	ASAHI YUKIZAI	
FULL OPENING ADJUSTMENT	ASAHI YUKIZAI	

Cv value for each opening degree

FULL-OPEN Cv VALUE

mm	15	20	25	32	40	50
inch	1/2	3/4	1	1 1/4	1 1/2	2
FULL-OPEN Cv VALUE	4.8	5.3	8.5	11	26	43

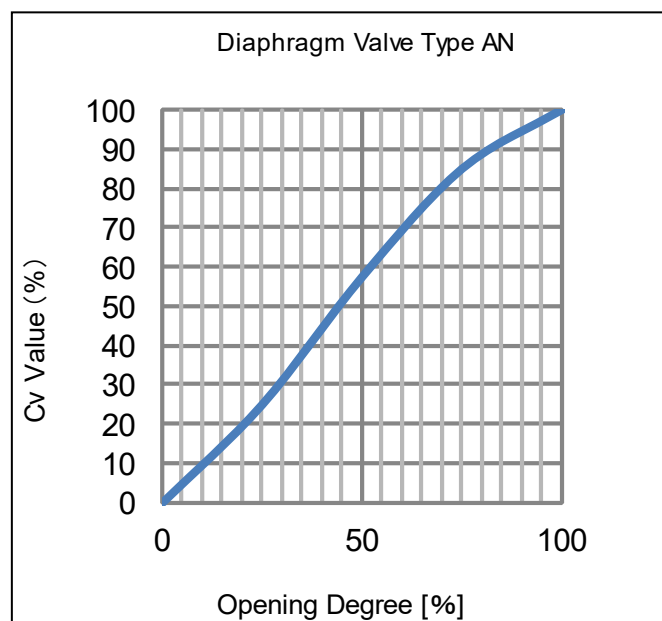

Product weight

TRUE UNION TYPE AN [AUTOMATIC PNEUMATIC TRUE UNION TYPE AN]

Unit : kg

mm	inch	DOUBLE ACTING				AIR TO OPEN				AIR TO CLOSE			
		U-PVC	C-PVC	PP	PVDF	U-PVC	C-PVC	PP	PVDF	U-PVC	C-PVC	PP	PVDF
15	1/2	2.3	2.3	1.8	2.3	2.3	2.8	2.3	2.8	2.3	2.4	1.9	2.4
20	3/4	2.3	2.3	1.9	2.3	2.8	2.8	2.4	2.8	2.3	2.4	2.0	2.4
25	1	2.3	2.3	2.4	2.8	2.8	2.8	2.9	2.8	2.3	2.4	2.5	2.9
32	1 1/4	2.7	2.7	2.4	2.8	3.2	3.2	2.9	3.12	2.7	2.7	2.5	2.9
40	1 1/2	5.3	5.3	4.8	5.3	6.3	6.8	6.3	6.8	5.5	5.5	5.0	5.5
50	2	5.8	5.8	5.0	5.7	6.8	6.8	6.5	7.2	6.0	6.0	5.2	5.9

Product model code list

ACTUATION	TYPE	ACTUATOR TYPE	ACTION /POWER SOURCE	BODY MATERIAL	SEAL MATERIAL	CONNECTION	STANDARD	SIZE
A	TI	*	*	*	*	*	*	***
A AUTOMATIC VALVE	TI TRUE UNION	PNEUMATIC	PNEUMATIC	U U-PVC	E EPDM	S SOCKET	1 JIS	015 15mm
		N TYPE AN	F DOUBLE ACTING	C C-PVC	1 PTFE+EPDM	N THREADED	D DIN	?
			G AIR TO OPEN	P PP	2 PTFE+FKM	P SPIGOT	A ANSI	050 50mm
			S AIR TO CLOSE	F PVDF				

Installation, Operation and Maintenance Manual

For details of Installation, Operation and Maintenance, please contact our nearest distribution agent or sales office.